

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 10/15/07'	~	

NOTES:

1. ELECTRICAL CHARACTERISTICS:

- 1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 1000MΩ Min.

2. ENVIRONMENT CHARACTERISTICS:

- 2.1 TEMPERATURE: -40°C~+105°C.

3. PRODUCT NUMBER CODE:

DS1026-06 - X X X X X

CONTACTS TYPE
V:VERTICAL

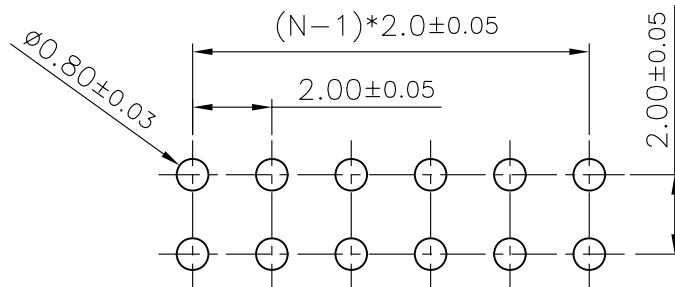
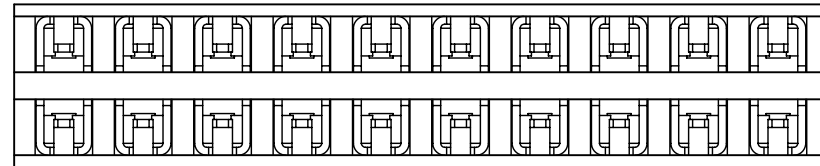
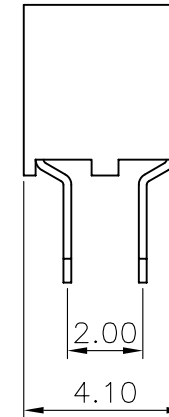
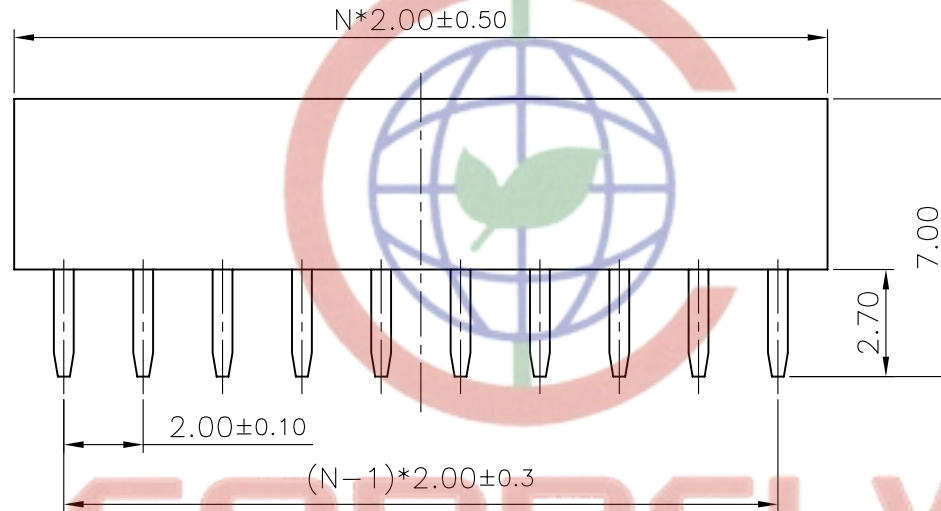
HOUSING COLOR
B:BLACK

CONTACT PLATING
8: FULL GOLD FLASH

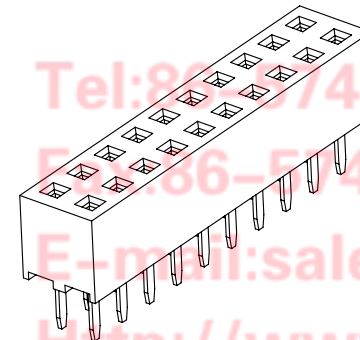
CONNECTOR TYPE
S:SOCKET



No.OF CONTACTS
2*2-2*40

SERIES No.
DS1026-06



Recommend PCB layout



GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.60	X.	±5°	UNITS	mm	FEMALE HEADER PITCH 2.00mmTYPE
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES DS1026-06 SERIES
.XX	±0.25	.XX	±2°	<div> 晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD</div>		
DRAWING TYPE		CUSTOMER				
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.	C-DS1026-06-XXXXX-A					